

MONOCRYSTALLINE MODULE

DM280-M156⁺-60 Black Series

60 x 6" / 255 - 280W

Wattages:

255 / 260 / 265

270 / 275 / 280



Technology

High module conversion efficiency through superior manufacturing technology



Durability

Module can bear snow loads (5400Pa) and wind loads (2400Pa)



Power Positive Tolerance

Guaranteed power output (0/+3%)



Performance

High performance under low light conditions (Cloudy days, mornings and evenings)



Quality

Manufactured according to International Quality and Environmental Management Systems (ISO9001, ISO14001)




Value


Our vertically integrated business model allows for competitive pricing and great value

DMEGCSOLAR.COM

The cells have better electrical parameters Superior Manufacturing - Quality Assurance



Visible Quality



Warranty

- 10 Year Manufacturer's Warranty
- 10 Year Warranty, 90% power output
- 25 Year Warranty, 80% power output

- M1 cells have been used in the modules with better performance in terms of parameters

- Durable, high-quality, smooth aluminum alloy frames
- Rigid construction -2400 Pa & 5400 Pa rated assembly
- Specially designed drainage holes prevent the frame from deforming or breaking due to freezing weather and other forces



Power Output



- All modules are manufactured using TQC & SPC quality control systems
- Advanced cell sorting to avoid electric mismatch
- Triple 100% EL Test- before & after lamination & prior to shipment
- Comprehensive Safety and Reliability tests are performed
- Our IP67 rated junction box improves module performance and stability
- High-performance connectors provide low resistance interconnection to ensure the full utilization of module output power

Certifications and standards:
IEC 61215, IEC 61730
- Conformity to CE UL1703



Electrical Specifications

* STC irradiance of 1000w/m², spectrum AM 1.5 and cell temperature of 25 °C

Module Type	Pm(W)	Tolerance	I _{mp} (A)	V _{mp} (V)	I _{sc} (A)	V _{oc} (V)	Module Efficiency
DM255-M156 ⁺ -60BK	255	0/+3%	8.65	29.5	9.11	38.1	15.58%
DM260-M156 ⁺ -60BK	260	0/+3%	8.73	29.8	9.15	38.2	15.88%
DM265-M156 ⁺ -60BK	265	0/+3%	8.81	30.1	9.19	38.3	16.19%
DM270-M156 ⁺ -60BK	270	0/+3%	8.89	30.4	9.23	38.4	16.50%
DM275-M156 ⁺ -60BK	275	0/+3%	8.96	30.7	9.28	38.5	16.80%
DM280-M156 ⁺ -60BK	280	0/+3%	9.04	31.0	9.33	38.6	17.11%

Mechanical Data

Cell Type	Monocrystalline 156.75X156.75mm
Cell Arrangement	60 (6 × 10)
Module Structure	Glass / EVA / Backsheet(Black)
Front Glass Thickness	3.2mm
Application Class	Class A at IEC 61730
Junction Box Rating	IP67
Cables	1000mm/4mm ²
Connector Type	MC4 compatible
Fire Rating Class	Class C

Maximum Ratings

Operating Temperature	-40°C to +85°C
Maximum Load Capacity	Snow - 5400 Pa / Wind - 2400 Pa
Maximum System Voltage	1000V DC (IEC)
Maximum Series Fuse Rating	15A
Number of Diodes / Busbars	3 / 4
Maximum Cell Efficiency	6" Mono/20.0%


Packaging

* frame sizes (35mm / 40 mm) available upon request

Module Dimensions	1650× 992 × 35 mm	1650 × 992 ×40 mm
Weight	18.5 kg	18.7 kg
Pallet Dimensions	1690 x 1130 x 1220mm	1690 x 1130 x 1230mm
Container	40' HQ	40' HQ
Pieces per Pallet	30	28
Pallets per Container	28	28
Pieces per Container	840	784
Gross Weight per Pallet	599 kg	570 kg
Gross Weight per Container	16,772 kg	15,960 kg


Temperature Characteristics

Nominal Operating Cell Temperature (NOCT)	45°C ± 2°C
Temperature Coefficient of I _{sc}	+0.0425% / °C
Temperature Coefficient of V _{oc}	-0.3682% / °C
Temperature Coefficient of P _{max}	-0.41% / °C

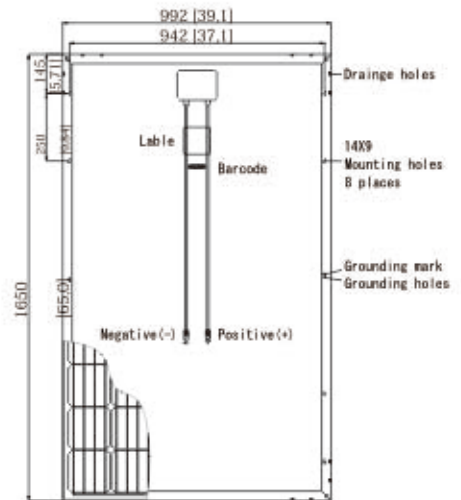


(Back side)
Note:mm[inch]

Current -Voltage & Power -Voltage Curve (260W)

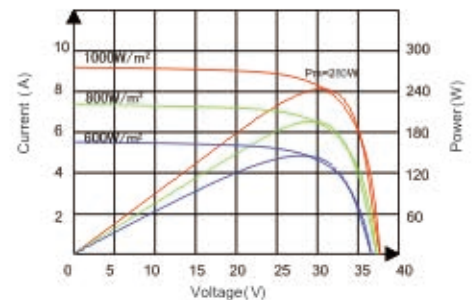

Temperature Dependence of I_{sc}, V_{oc}, P_{max}

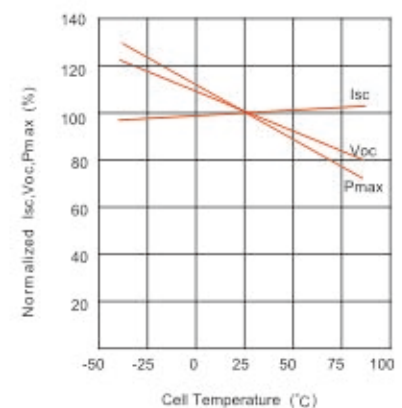

Hengdian Group DMEGC Magnetics Co., Ltd.
Hengdian Industrial Zone, Dongyang City
Zhejiang Province, China 322118

Tel: 0086-579-8655-4950 Fax: 0086-579-8655-4845
Email: solar@dmegc.com.cn
www.chinadmegc.com www.dmegcsolar.com