



HT Solar Energy J.S.C.

Shanghai Aerospace Automobile Electromechanical Co., Ltd.

HIGHWAY

SUSTAINING INNOVATION
SINCE 1960S

Shanghai Aerospace Automobile
Electromechanical Co., Ltd.

Add: F19, South Tower of Astronaut Building,
No 222, Caixi Rd,
Shanghai 200235, China, 200235

Tel: 0086-21-64828990-6208
Fax: 0086-21-64518393

Company website: www.ht-saae.com
Factory website: www.ssec-solar.com

HT Solar Energy J.S.C.


Istanbul Industry and Free Trade Zone
Aydinli SB Dist. 1. Street
Tuzla / Istanbul / Turkey

Tel: +90 216 504 72 73

Company website:
www.ht-saae.com
www.hstsolar.com.tr

CONTENTS

HIGHWAY

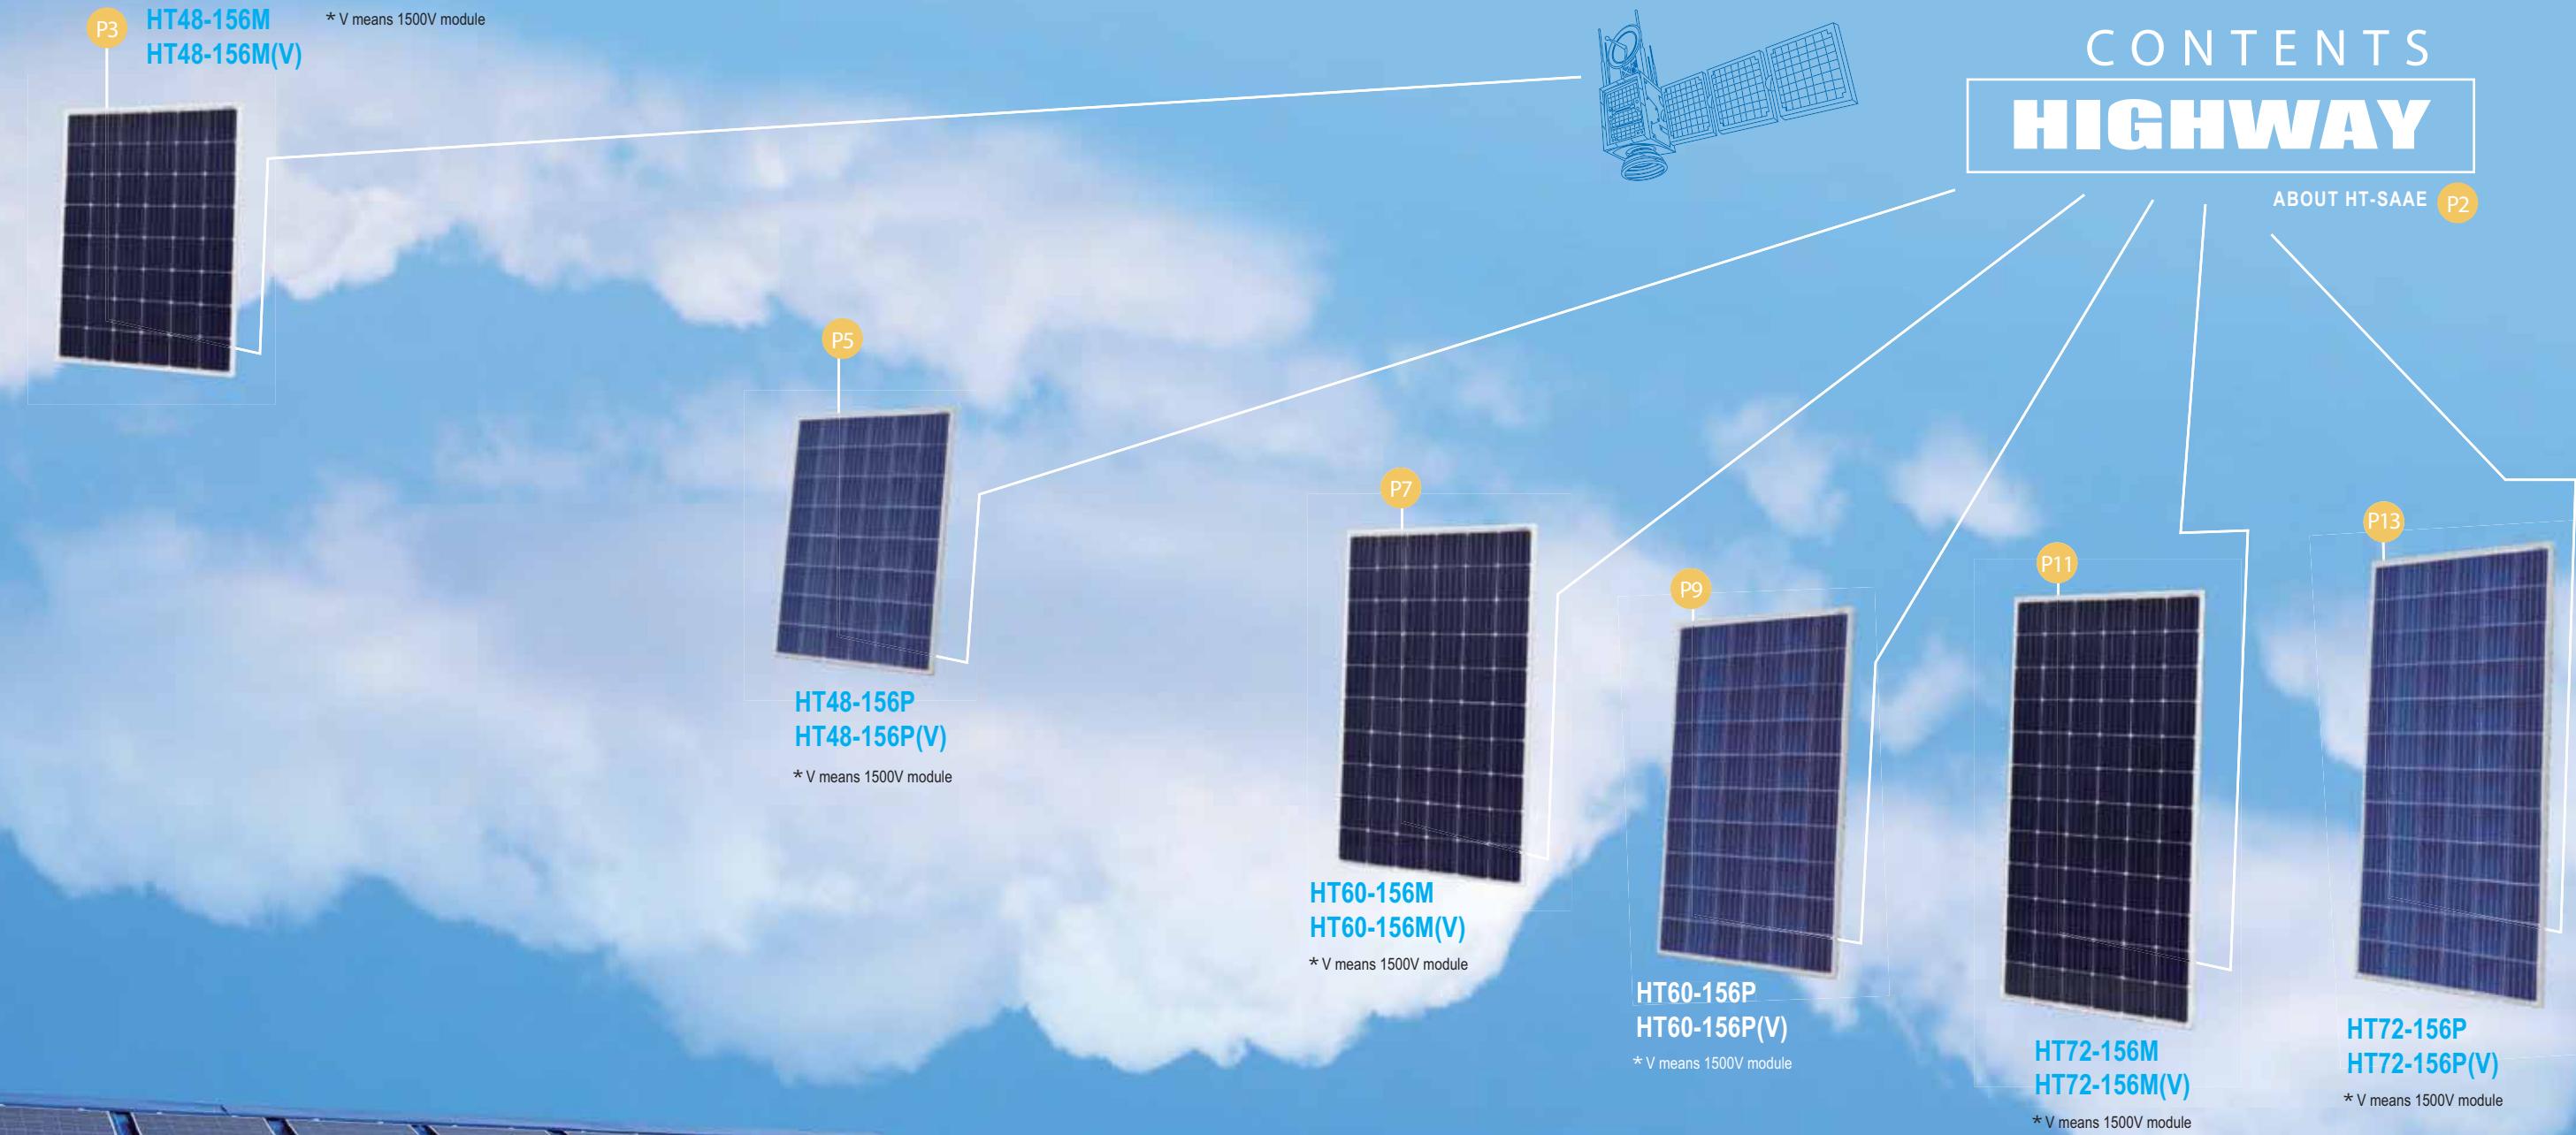

HIGHWAY



Silicon

Wafers

Solar Cells

PV Modules

PV Systems



ORISI Silicon Co.,Ltd



Shanghai Shenzhou New Energy
Development Co., Ltd



Lianyungang Shenzhou
New Energy Co., Ltd



Shanghai Solar Energy S&T Co., Ltd



HT Solar Energy J.S.C.



HT-SAAE A Large Scale State-Owned Company

Shanghai Aerospace Automobile Electromechanical Co. Ltd.,(HT-SAAE) belongs to China Aerospace Science & Technology Corporation, and Shanghai Academy of Spaceflight Technology. HT-SAAE started its research on solar technology application in space since 1960's.

As a large scale state-owned company, HT-SAAE owns a vertically-integrated industry chain from silicon ingots, wafers, cells, solar modules to solar systems and its subsidiaries have formed three main industry bases in Inner Mongolia, Shanghai and Jiangsu.

Since the beginning of 21st century, we have undertaken around 600 solar PV systems, including the "Bright Project" in west of China, The roof-top solar system for 2010 World EXPO. Solar plant in Jia Yuguan, China and solar plants in Italy and Germany.



Reliable State-owned Enterprise Deliver Solar Power since 1960s

HIGHWAY

Solar Module HT60-156P HT60-156P(V) 265W-280W

* V means 1500V module



Advanced surface treatment , less surface reflection and 5BB cell design can reduce the series resistance and improve the module efficiency

17.2%
Module Efficiency

Designed for high voltage systems of up to 1500 VDC, increasing the string length of solar systems and saving on BoS costs



TUV certification

P_{kW}
Higher module's output power

Certified to withstand dynamic mechanical load 1000 Pascal

IEC
HT-SAAE guarantees highest production standards: IEC 61215, IEC 61730, IEC 62716(Ammonia corrosion) & IEC 61701 (Salt Mist Corrosion)

PID
PID resistant

Microcrack resistant
Triple EL tested of high quality control.

2%
All the modules are sorted and packaged by amperage, reducing mismatch losses and maximizing system output.

10Ys
Products Warranty

25Ys
Warranty on power output

ISO
Strict quality control, meeting the highest international standards: ISO 9001, ISO14001 and OHSAS18001

5W
Positive tolerance 0/+5w guaranteed

Entire module certified to withstand extreme wind (2400 Pa) and snow loads (5400 Pa)



Electrical Characteristics

Module	HT60-156P / HT60-156P (V)			
Maximum Power at STC(Pmax)	265W	270W	275W	280W
Open-Circuit Voltage(Voc)	37.8V	38V	38.2V	38.4V
Short-Circuit Current(Isc)	9.04A	9.11A	9.18A	9.25A
Optimum Operating Voltage (Vmp)	31.7V	32.1V	32.5V	32.9V
Optimum Operating Current(Imp)	8.37A	8.42A	8.47A	8.52A
Module Efficiency	16.3%	16.6%	16.9%	17.2%
Power Tolerance	0 ~ +5W			
Maximum System Voltage	1000V/1500V DC			
Maximum Series Fuse Rating	15A			
Operating Temperature	-40 to +85			
STC:Irradiance 1000W/m ² , module temperature 25, AM=1.5				
Optional black frame or white frame module according to customer requirements				

NOCT

Module	HT60-156P / HT60-156P (V)			
Maximum Power	195W	198W	202W	206W
Open Circuit Voltage (Voc)	35.0V	35.2V	35.4V	35.6V
Short Circuit Current (Isc)	7.30A	7.36A	7.42A	7.47A
Maximum Power Voltage (Vmp)	29.3V	29.7V	30.1V	30.4V
Maximum Circuit Current (Imp)	6.64A	6.68A	6.72A	6.75A
NOCT	45 °C ± 2 °C			
NOCT : Irradiance 800W/m ² , ambient temperature 20 , wind speed 1 m/s				

Mechanical Characteristics

Solar Cells	Polycrystalline 156.75 x 156.75mm		
No.of Cells	60 (6 x 10)		
Dimensions	1640mmx992mmx35mm(64.6x39x1.4in)		
Weight	18.5kg(40.8lbs)		
Front Glass	High transmission tempered glass		
Frame	Anodized aluminium alloy		
Junction Box	IP67		
Cable	4mm ² (IEC) , 900mm		
Connectors	MC4/MC4 Compatible		
Packaging Configuration	30pcs/box, 910pcs/40' HQ Container		



Temperature Characteristics

Temperature Coefficient of Pmax	γ (Pm)	-0.41%/K
Temperature Coefficient of Voc	β (Voc)	-0.32%/K
Temperature Coefficient of Isc	α (Isc)	0.050%/K

Warranty

10-year product warranty	Added Value from Warranty
25-year warranty on power output	
Specific information is referred to the product quality guarantee	

Information Box

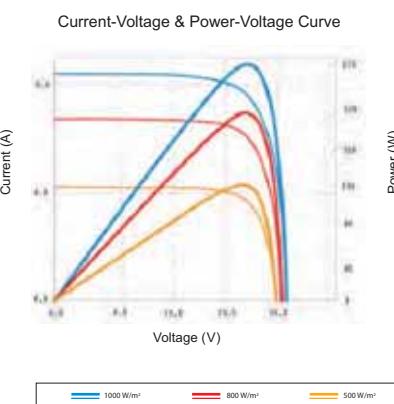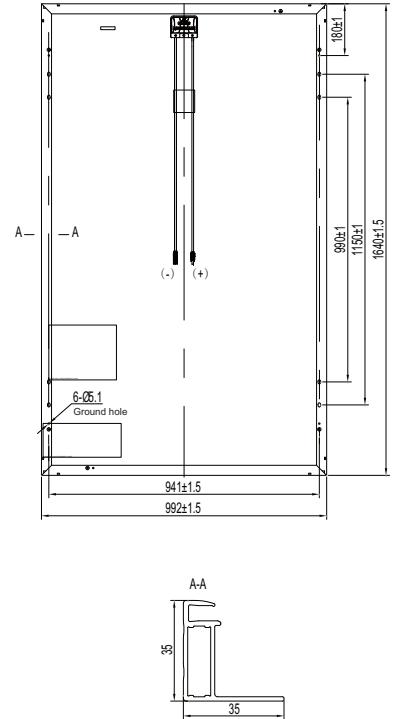

I-V Curves

Shanghai Aerospace Automobile Electromechanical Co., Ltd.
HT Solar Energy J.S.C.

Factory : Liyangang ShenZhou New Energy Co., Ltd.
HT Solar Energy J.S.C.



HIGHWAY

