


280W, 25W > Average
100% Communication
20% + Power Output

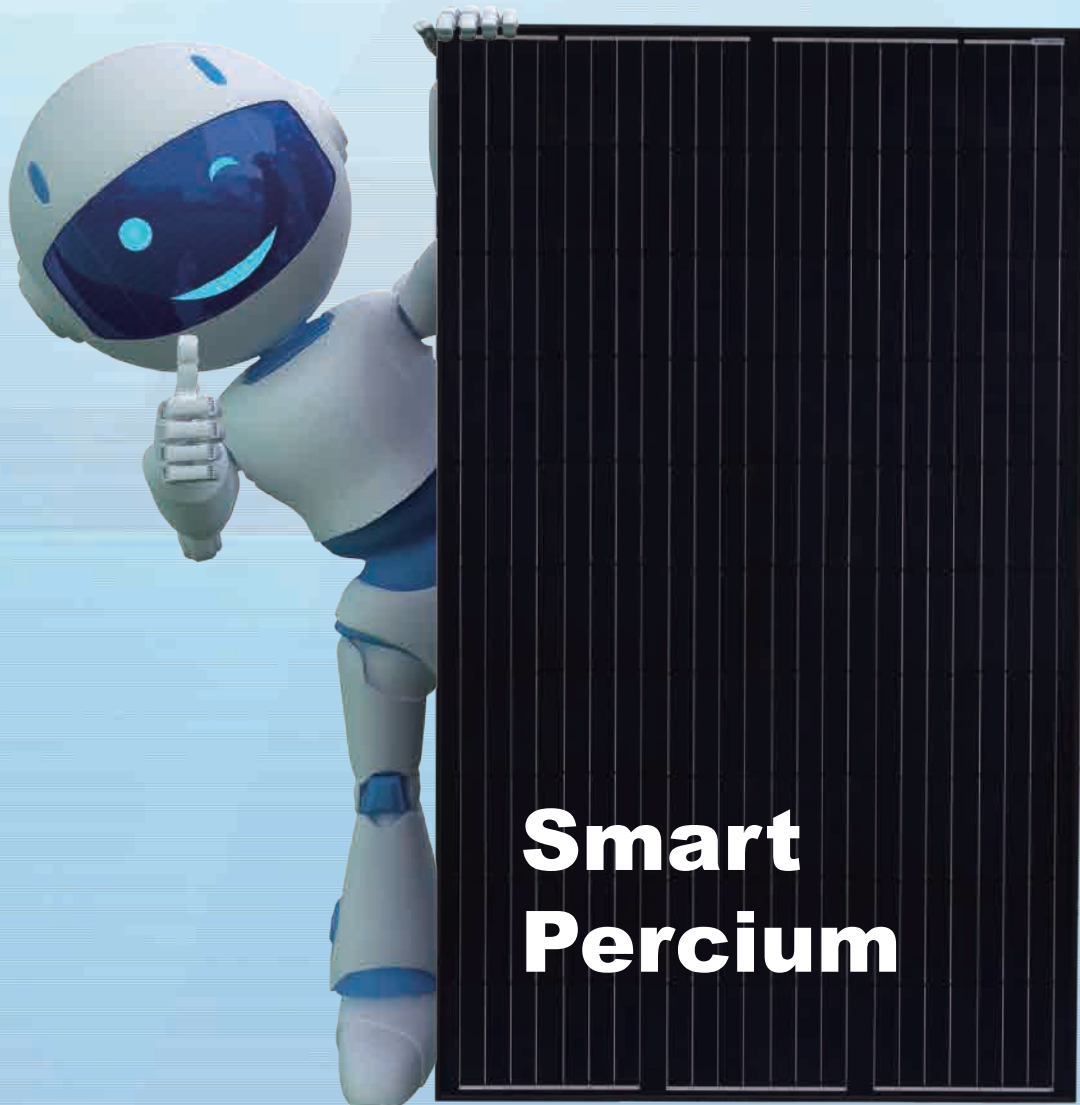


JA Solar Holdings Co., Ltd.

JA Solar Holdings Co., Ltd is a world leading manufacturer of high-performance solar power products that convert sunlight into electricity for residential, commercial and utility-scale power generation. The company was founded in May 2005 and publicly listed on NASDAQ in February 2007. JA Solar has been the world's leading cell producer since 2010, and has firmly established itself as a tier 1 module supplier since 2012. Capitalizing on our strength in solar cell technology, we are committed to provide modules with unparalleled conversion efficiency, yield efficiency, and reliability to enable you to maximize your returns on PV projects. With its leading industry experience, continuous effort on R&D, customer-oriented service and sound financial status, JA Solar is your best choice of long-term trustworthy partner.

Add: Building No.8, Nuode Center, Automobile Museum East Road, Fengtai District, Beijing
 Tel: +86 (10) 63611888
 Fax: +86 (10) 63611999
 Email: sales@jasolar.com market@jasolar.com

Product Warranty

- 12-year product warranty
- 25-year linear power warranty

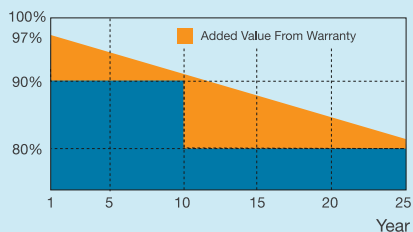

Additional Insurance Options



Partner Section

JAM6 (K) (BK) (SE)

-60/280-300/PR

MONOCRYSTALLINE SILICON MODULE

Key Features



JA Monocrystalline smart modules designed for residential applications, especially for rooftop market



The mono cell technology with passivated backside and local BSF, 20.4% average mass production efficiency



Maximum energy gain ground mounted system: 2-5%, commercial 2-10%, residential 2-25%



Automatic module shut-down Unique electrocution prevention and fire safety



Flexible system design optimal site space utilization at reduced cost



Real-time alerts module-level web monitoring Increased uptime maintenance



High salt and ammonia resistance certified by TÜV NORD

Reliable Quality

- Positive power tolerance: 0~+5W
- 100% EL double-inspection ensures modules are defects free
- Potential Induced Degradation (PID) Resistant

Comprehensive Certificates

- IEC 61215, IEC 61730, MCS and CE
- ISO 9001: 2008: Quality management systems
- ISO 14001: 2004: Environmental management systems
- BS OHSAS 18001: 2007: Occupational health and safety management systems
- Environmental policy: The first solar company in China to complete Intertek's carbon footprint evaluation program and receive green leaf mark verification for our products




Specifications subject to technical changes and tests. JA Solar reserves the right of final interpretation.

JAM6 (K)(BK)(SE)-60/280-300/PR



System Architecture

JA smart system components work together with any inverter to maximize energy harvest. JA smart modules can communicate by electrical line, allowing users to monitor system performance in real time.

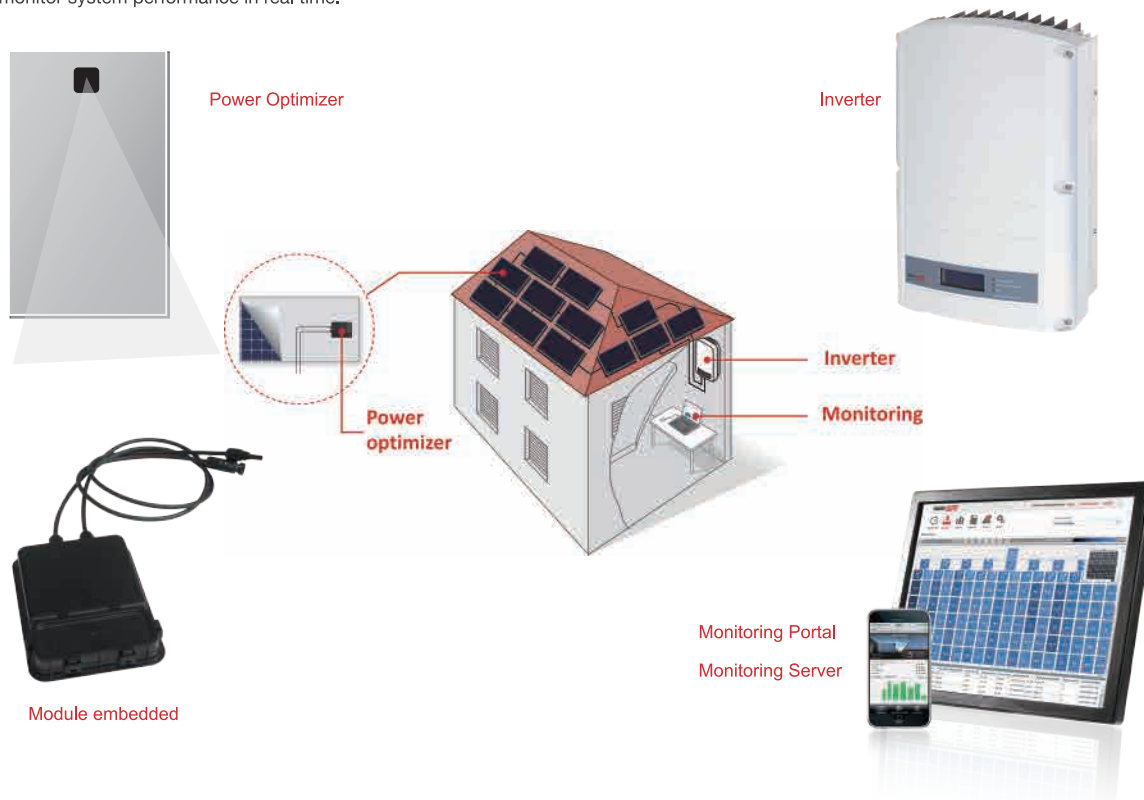



| String Lengths (computed automatically by SolarEdge Site Designer) | | | | | | |
|--|------------------------------------|-----|-----|-----|-----|-----|
| Module Power | | 280 | 285 | 290 | 295 | 300 |
| MINIMUM string size with SolarEdge inverter | 1ph | 8 | | | | |
| | 3ph | 16 | | | | |
| | 3ph-MV | 18 | | | | |
| MAXIMUM string size with SolarEdge inverter | 1ph | 18 | 18 | 18 | 17 | 17 |
| | 3ph | 40 | 39 | 38 | 38 | 38 |
| | 3ph-MV | 45 | 44 | 43 | 43 | 43 |
| String size with Non-SolarEdge | According to inverter design rules | | | | | |

| Output Voltages and Currents | | |
|---|-----------------|-----|
| Operating Output Voltage when connected to SolarEdge Inverter | 5-60 | Vdc |
| Operating Output Voltage when connected to Non-SolarEdge Inverter | 5-Voc of module | Vdc |
| Maximum Output Current when connected to SolarEdge Inverter | 15 | Adc |
| Maximum Output Current when connected to Non-SolarEdge Inverter | 10 | Adc |
| Output in Standby mode with SolarEdge inverter or with SMI and Non-SolarEdge inverter (when disconnected from inverter or inverter off) | 1 | Vdc |

| Standard Compliance | |
|------------------------|---|
| Fire Safety | VDE-AR-E 2100-712:2013-05 |
| PV Junction Box Safety | IEC62109-1 (class II safety, TUV-SUD), UL1741 (TUV-Rheinland & CSA) |
| PV Junction Box | EN50548 (TUV-SUD), UL3730 (TUV-Rheinland & CSA) |

JAM6 (K)(BK)(SE)-60/280-300/PR

Engineering Drawings

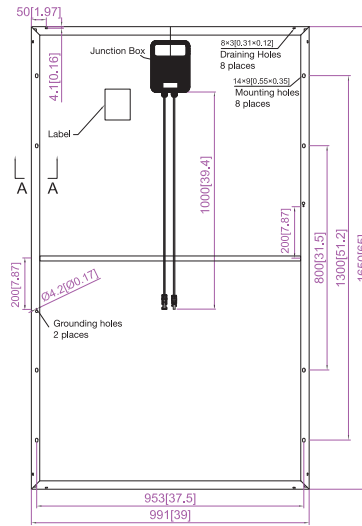
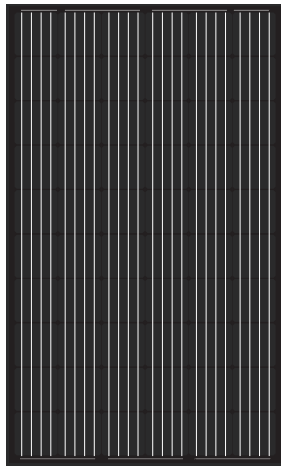


| MECHANICAL PARAMETERS | |
|---|-------------------------------------|
| Cell (mm) | Almost Full Square 156.75×156.75 |
| Weight (kg) | 19.5 |
| Dimensions (L×W×H) (mm) | 1650×991×40 |
| Cable Cross Section Size (mm ²) | 6 |
| No. of Cells and Connections | 60 (6×10) |
| Junction Box | Solar edge smart J-Box |
| Connector | MC4 |
| Packaging Configuration | 27 Per Pallet |


| WORKING CONDITIONS | |
|--|----------------------------------|
| Maximum System Voltage | DC 1000V (TÜV) |
| Operating Temperature | -40°C~+85°C |
| Maximum Series Fuse | 15A |
| Maximum Static Load, Front (e.g., snow and wind) | 5400Pa (112 lb/ft ²) |
| Maximum Static Load, Back (e.g., wind) | 2400Pa (50 lb/ft ²) |
| NOCT | 45±2°C |
| Application Class | Class A |

| TYPE | ELECTRICAL PARAMETERS | | | | |
|--|---|-------------------------------|-------------------------------|-------------------------------|-------------------------------|
| | JAM6(K)(BK) (SE)-60-280/PR | JAM6(K)(BK) (SE)-60-285/PR | JAM6(K)(BK) (SE)-60-290/PR | JAM6(K)(BK) (SE)-60-295/PR | JAM6(K)(BK) (SE)-60-300/PR |
| Rated Maximum Power at STC (W) | 280 | 285 | 290 | 295 | 300 |
| Open Circuit Voltage (Voc/V) | 39.05 | 39.25 | 39.46 | 39.64 | 39.85 |
| Maximum Power Voltage (Vmp/V) | 31.60 | 31.70 | 31.80 | 32.03 | 32.26 |
| Short Circuit Current (Isc/A) | 9.38 | 9.46 | 9.57 | 9.66 | 9.75 |
| Maximum Power Current (Imp/A) | 8.86 | 8.99 | 9.12 | 9.21 | 9.30 |
| Module Efficiency [%] | 17.12 | 17.43 | 17.74 | 18.04 | 18.35 |
| Power Tolerance (W) | -0~+5W | | | | |
| Temperature Coefficient of Isc (αIsc) | +0.060%/C | | | | |
| Temperature Coefficient of Voc (βVoc) | -0.300%/C | | | | |
| Temperature Coefficient of Pmax (γPmp) | -0.390%/C | | | | |
| STC | Irradiance 1000W/m ² , Cell Temperature 25°C, Air Mass 1.5 | | | | |

I-V CURVE

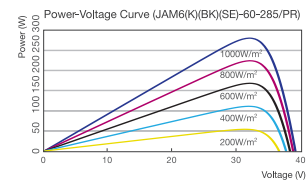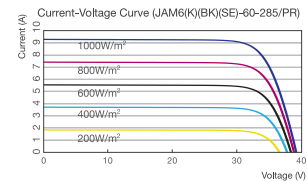

| TYPE | NOCT | | | | |
|---------------------------------|---|-------------------------------|-------------------------------|-------------------------------|-------------------------------|
| | JAM6(K)(BK) (SE)-60-280/PR | JAM6(K)(BK) (SE)-60-285/PR | JAM6(K)(BK) (SE)-60-290/PR | JAM6(K)(BK) (SE)-60-295/PR | JAM6(K)(BK) (SE)-60-300/PR |
| Max Power at STC (Pmax) [W] | 204.71 | 208.36 | 212.02 | 215.67 | 219.33 |
| Open Circuit Voltage (Voc) [V] | 35.81 | 36.01 | 36.24 | 36.46 | 36.65 |
| Max Power Voltage (Vmp) [V] | 28.55 | 28.62 | 28.81 | 28.87 | 28.94 |
| Short Circuit Current (Isc) [A] | 7.64 | 7.73 | 7.81 | 7.89 | 7.98 |
| Max Power Current (Imp) [A] | 7.17 | 7.28 | 7.36 | 7.47 | 7.58 |
| Condition | Under Normal Operating Cell Temperature, Irradiance of 800 W/m ² , spectrum AM 1.5, ambient temperature 20°C, wind speed 1 m/s | | | | |

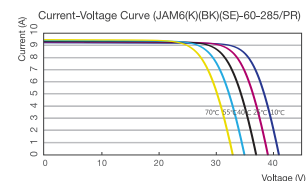

Electrical data in this catalog do not refer to a single module and they are not part of the offer. They only serve for comparison among different module types.